

UNISTRUT CURVED CHANNEL

Unistrut can provide our channel curved to your specifications. Curved channel is commonly used for tunnel applications, or for mounting to curved surfaces, ceilings or walls. Below is a summary of our capabilities and limitations, and on the back is an order form to request a quote.

General Specifications:

- **Channel Options:** P1000 (others may be available upon request)
- **Pierced Channel:** On request
- **Material and Finish Options:** Hot-Dipped Galvanised (HDG), Pre-Galvanized (PG), Stainless Steel (SS) & Unistrut Defender (DF)
- **Minimum Radius:** 3 Metres (to avoid damage to the channel and for trolley applications)
- **Useable Lengths:** Up to 17m arc length per channel
 - 20m channel will result in 17m of useable curved channel. For lengths greater than 17m, multiple curved sections are required. All curves must be field trimmed to achieve required arc length. Multiple sections must be field or shop welded for arc lengths exceeding 17m.

CURVED CHANNEL ORDER FORM

Required Information:

1. Arc:

- a. Arc Length: _____ or
- b. Degree of Arc: _____

2. Slot Direction:

- a. Slot In
- b. Slot Out

3. Radius (3M minimum)

- a. Inside: _____
- b. Centerline: _____
- c. Outside: _____

4. Channel Section (e.g. P1000): _____

5. Finish:



- a. Hot-Dipped Galvanised (HDG)
- b. Pre-Galvanized (PG):
- c. Stainless Steel
- d. Unistrut Defender (DF):

6. Application (Optional):

- a. Open space, no restriction:
- b. Restrictions:
 - i. Curved wall
 - ii. Curved ceiling:
 - iii. Vertical alignment:
 - iv. Boxed-in area:

v. Other: _____

Quantity Required: _____

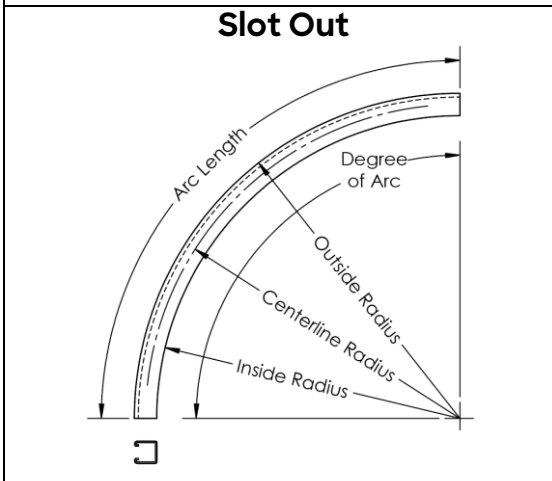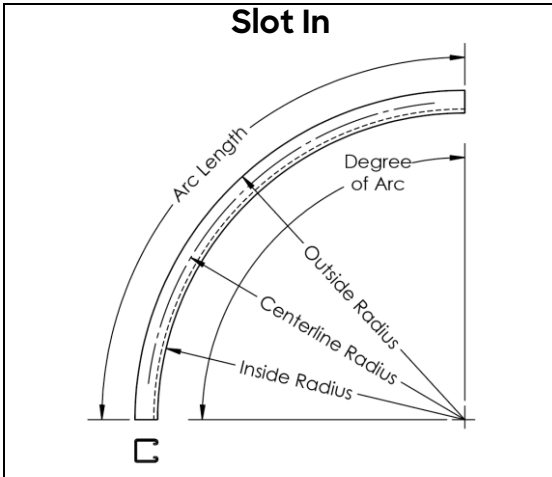

Contact Information:

Name: _____

Phone Number: _____

Company: _____

Email Address: _____

Complete this form and return it to your Unistrut Sales Agent, or email it to technical@atkore.com